



## Product Data Sheet

# AmberSep™ GT74 Chelating Resin

## Industrial-grade Complexing Resin

### Description

AmberSep™ GT74 Chelating Resin is a weakly acidic cation exchange resin with very pronounced selectivity for certain metal ions such as mercury, rhodium, copper, silver, cadmium, and lead.

AmberSep™ GT74 has been developed for the removal of mercury from different solutions and gaseous streams and can be regenerated very efficiently with hydrochloric acid.

AmberSep™ GT74 is insoluble in common solvents and stable over the entire pH range. Oxidizing media should be avoided. The special properties of AmberSep™ GT74 can be useful for problems where removal of metal ions Cu, Ag, Pb, and Cd is desired. Applications may be found in different fields of chemical technology such as wastewater treatment, recovery of solutions and metals in the plating industry, recovery of catalysts and removal of interfering ions in hydrometallurgy.

### Applications

- Wastewater treatment
- Flue gas desulfurization blowdown
- Electroplating
- Hydrometallurgy
- Chlor-alkali streams for mercury cell electrodes

### Typical Properties

Physical Properties	
Copolymer	Styrene-divinylbenzene
Matrix	Macroporous
Type	Chelant
Functional Group	Thiol
Physical Form	Green-gray, opaque, spherical beads
Chemical Properties	
Ionic Form as Shipped	H <sup>+</sup>
Total Exchange Capacity	≥ 1.40 eq/L (SH form)
Water Retention Capacity	38.0 – 46.0% (H <sup>+</sup> form)
Particle Size §	
Particle Diameter	450 – 700 μm
Uniformity Coefficient	≤ 1.60
< 425 μm	≤ 12.0%
> 850 μm	≤ 10.0%
Density	
Bulk Density as Shipped	784 g/L

§ For additional particle size information, please refer to the [Particle Size Distribution Cross Reference Chart](#) (Form No. 45-D00954-en).

## Suggested Operating Conditions



Maximum Operating Temperature	60°C (140°F)
pH Range	0 – 14
Bed Depth, min.	1000 mm (3.1 ft)
Flowrates	
Service	10 BV*/h (1.25 gpm/ft <sup>3</sup> )
Backwash	About 12 m/h (5 gpm/ft <sup>2</sup> ) with water at 20°C (68°F)
Total Rinse Requirement	2 – 3 BV (15 – 22.5 gal/ft <sup>3</sup> )
Regenerant	Concentrated HCl

\* 1 BV (Bed Volume) = 1 m<sup>3</sup> solution per m<sup>3</sup> resin or 7.5 gal per ft<sup>3</sup> resin

## Application Information


### Selectivity Sequence

The selectivity sequence of AmberSep™ GT74 Chelating Resin is:

Hg > Ag > Cu > Pb > Cd > Ni > Co > Fe > Ca > Na

### Equilibrium Capacity Data

The high selectivity of AmberSep™ GT74 Chelating Resin for certain metals is shown in the graph below as a function of pH. All data were determined in a normal solution of NaNO<sub>3</sub>. The resin has a pronounced preference for copper, lead, and cadmium ions, which are removed in considerable quantities, even from solutions containing only 1 meq/L of metal and a large excess of Na<sup>+</sup> ions. The data indicate the possibility of selective separation of these metals.

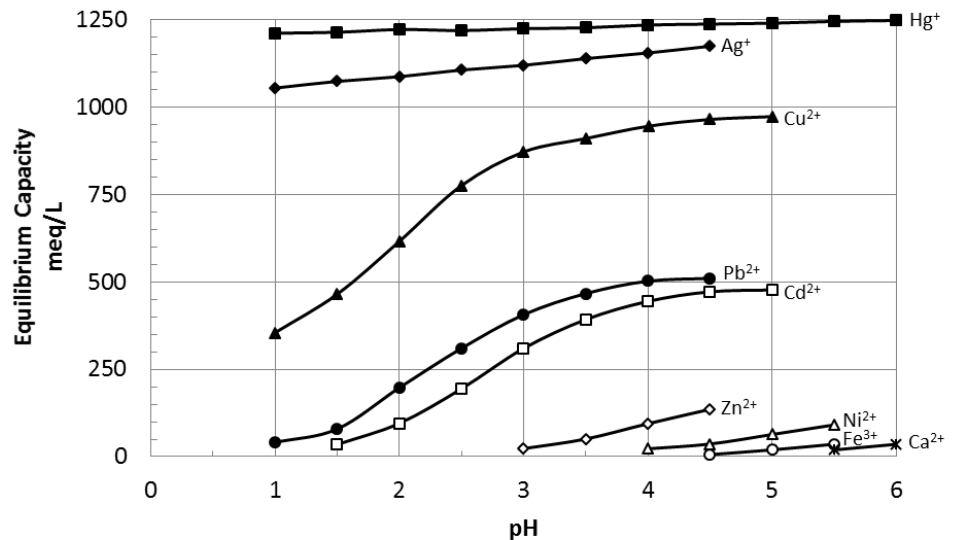

## Application Information (Cont.)



## Example: Removal of lead from wastewater

Influent composition:

Pb <sup>2+</sup>	6 ppm
Sb <sup>3+</sup>	0.3 ppm
Na <sup>+</sup>	100 ppm
pH	2.5

In the experiment, the solution passed through a column of AmberSep™ GT74 Chelating Resin at a flowrate of 15 m/h (6 gpm/ft<sup>2</sup>). The effluent contained less than 0.01 ppm Pb. After passage of 700 bed volumes of the solution, the effluent composition was still unchanged.

## Product Stewardship

DuPont has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with DuPont products—from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

## Customer Notice

DuPont strongly encourages its customers to review both their manufacturing processes and their applications of DuPont products from the standpoint of human health and environmental quality to ensure that DuPont products are not used in ways for which they are not intended or tested. DuPont personnel are available to answer your questions and to provide reasonable technical support. DuPont product literature, including safety data sheets, should be consulted prior to use of DuPont products. Current safety data sheets are available from DuPont.

Please be aware of the following:

- **WARNING:** Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Have a question? Contact us at:

[www.dupont.com/water/contact-us](http://www.dupont.com/water/contact-us)

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.

© 2023 DuPont. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours Inc., unless otherwise noted.

